SURFACE ROUGHNESS	RATINGS (a)	UNDER 0.8	UNDER 6.3	UNDER 25	UNDER 100	MACHINED SURFACE	PREVIOUS DRAWING
	▽▽▽▽	▽▽▽	▽▽	▽	～		U1-0M015

REVISIONS

NO.	UC NO.	DESCRIPTION	(DATE)	ZONE	APPROVED	CHECKED	DRAWN
A[2]	UC13254	防振ステー高さ寸法を変更した。	2021.7.21	A,C-4	木下	古川	甘利
B[2]	UC13554	防振ステー高さ寸法を変更した。	2021.12.14	A,C-4	木下	古川	甘利

For Tier 2
TW: IR[2] Max. 9000 kg・m[2]

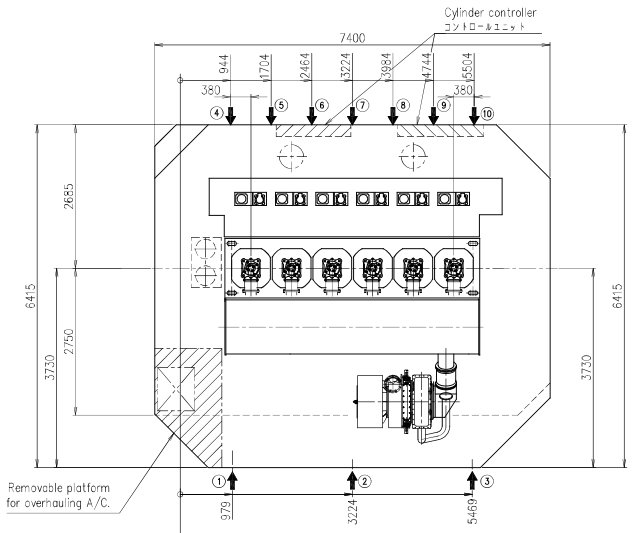

PLAN
平面図

Position of engine stay attachment.
←：防振ステー配置位置

	Type	Total	Exh.side ①	②	③	Pump side ④	⑤	⑥	⑦	⑧	⑨	⑩
CASE1	Friction	3	○	○	○	×	×	×	×	×	×	×
CASE2	Hydraulic	4	○	×	○	○	×	×	×	×	×	○
CASE3	Friction	4	○	×	○	○	×	×	×	×	×	○
CASE4	Friction	3	×	×	×	○	×	△	○	△	×	○
CASE5	Friction	4	×	×	×	○	△	○	△	○	△	○

○○：Standard position
△：Optional position
Optional position can be applied as below.
⑦ → ⑥ or ⑧
⑥ → ⑤ or ⑦
⑧ → ⑦ or ⑨

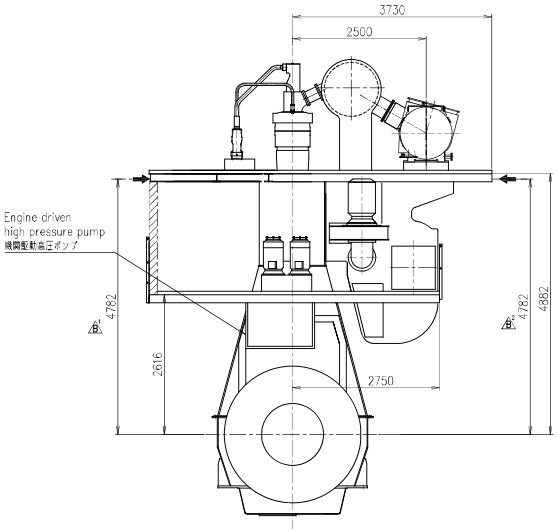

DRIVING END
出力軸側より見る

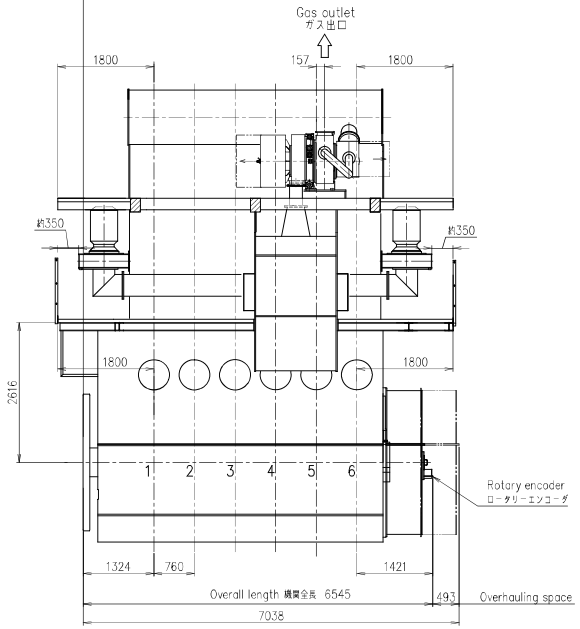

EXHAUST SIDE
排気側より見る

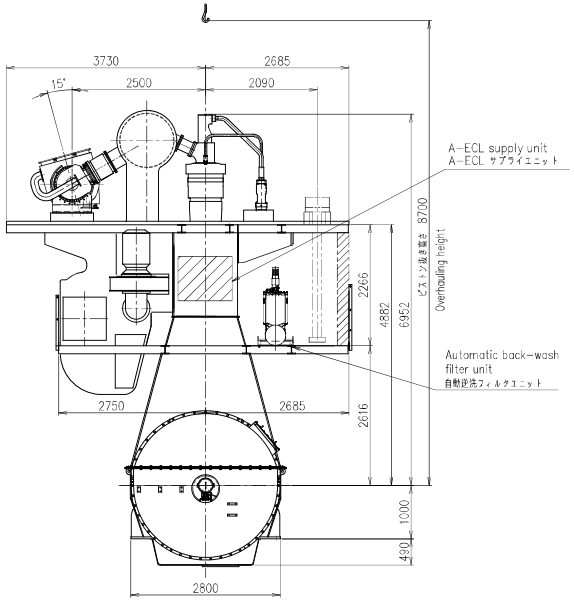

FREE END
自由端より見る

COMMON VARIATION OF TOLERANCE (MACHINING) (M.M)	RATINGS OF NOMINAL DIMENSION	OVER 0.5 TO 6	OVER 6 TO 30	OVER 30 TO 120	OVER 120 TO 400	OVER 400 TO 1000	OVER 1000 TO 2000	OVER 2000 TO 4000	OVER 4000 TO 8000	OVER 8000 TO 16000
	TOLERANCE	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2	± 2.0	± 2.0	± 2.5

THIS DRAWING IS THE PROPERTY OF JAPAN ENGINE CORPORATION.
AND SHALL NOT BE REPRODUCED, NOT BE USED TO FURNISH ANY INFORMATION FOR MAKING DRAWINGS OR APPARATUS EXCEPT FOR THE CASE WHERE JAPAN ENGINE CORPORATION AGREES WITH WRITTEN MATERIALS.

PART NO.	MARK	DESCRIPTION	MATERIALS	1-PIECE WEIGHT (kg)	TOTAL QUANTITY PER SET
	1	GENERAL ARRANGEMENT (OUTLINE) 全体装置外形図			

開発部		6UEC42LSH-Eco	
APPROVED 江戸	APPROVED	GENERAL ARRANGEMENT (OUTLINE)	
CHECKED 古川	CHECKED	全体装置外形図 (MET37MB×1)	1/1
DRAWN	DRAWN		00-00
1st ANGLE PROJECTION	DATE DRAWN 2021-2-17 / SCALE 1/50	DRAWING NO. U1-0M019	REV.NO. B

JAPAN ENGINE CORPORATION